


Aluminum surface with Trim color:



Line Voltage

120Vac or 277Vac line voltage, self-selected

DL2e-DC

Junction Box*, IC Rated

60 degree beam

42 watts standard (de-rated wattage available)

50,000 hours rated life

5 Year Warranty

Suitable for Dry or Damp Location

When ordering for damp location, request the lens to be sealed.

Operating Temperatures:

-40°F to 106°F
 -40°C to 40°C

White	CCT	CRI	Input Power (W)	Lumen Output (120V/277V)	eff (lm/w) (120V/277V)	Power Factor (120V/277V)
Soft	2700K	81	42	3660 / 3750	87 / 89	100 / 93
Warm	3000K	82	42	3700 / 3775	88 / 90	100 / 93
Neutral	3500K	83	42	3700/ 3775	88 / 90	100 / 92
Cool	4000K	83	42	3780 / 3830	90 / 91	100 / 93
Daylight	5000K	82	42	3950 / 4010	94 / 96	100 / 93



3500K

Standard Frosted Lens

Input Power (W)	Lumen Output	Eff (lm/w)
42	3780	90
38	3500	92
34	3200	94

Mounting:

IC Rated - Mounts to sheet rock or drop ceiling 9" ~ 10.5" hole

Application:

Commercial & Residential

Weight: 3.7 lbs

Performance:

The **DL2e-DC Downlight** is powered by a **MCOB (Multi-Chip-On-Board)** light engine. enLux's proprietary thermal management enables the LED emitter to operate at the lowest possible junction temperature which ensures long life and excellent efficacy. A unique **Osram Duris E5 LED** emitter is employed for the production of the engine.

The **enLux DL2e-DC Down Light** housing is finished in an ultra-durable top coat, safe, cool-to-the-touch, 100% recyclable (no mercury or hazardous materials)**.


*California Title 24 compliant, **California Title 22 compliant





DL2e-DC 42W Down Light Photometrics

0 ft	Illuminances Distribution Ratio					
3 ft					0.019	1.000
6 ft				0.005	0.095	0.250
9 ft			0.002	0.020	0.072	0.111
12 ft	0.001	0.007	0.024	0.049	0.063	
15 ft	0.001	0.003	0.010	0.021	0.034	0.040
	15 ft	12 ft	9 ft	6 ft	3 ft	CL

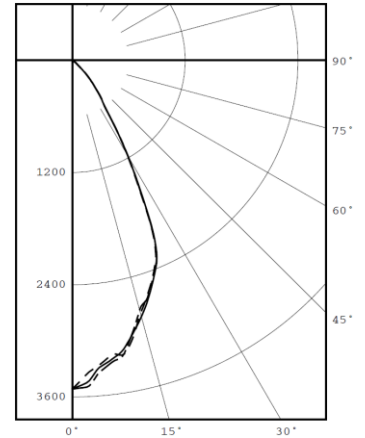


Candle Power Distribution

DL2e-DC 42W Illuminance at Beam Centerline

CCT	P/N	Total	Throw Distance (feet)				
			6	9	12	18	24
2700K	86130X	3750	112.3	49.9	28.0	12.5	7.1
3000K	86230X	3775	113.0	50.2	28.2	12.6	7.1
3500K	86330X	3775	113.0	50.2	28.2	12.6	7.1
4000K	86430X	3830	114.7	51.0	28.6	12.8	7.2
5000K	86430X	4010	120.1	53.4	30.0	13.7	7.5

Unit in foot-candle (fc), 1 fc = 10.76 lux

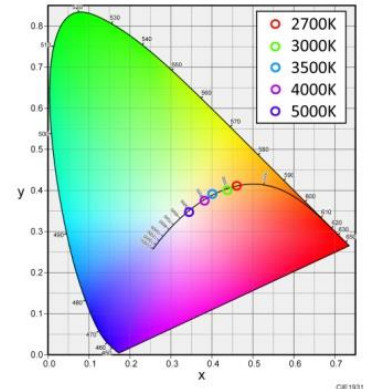

Product code	Color CCT	Input Power	Voltage	Trim Type/ Configuration	Trim Color	
8	61 2700K	3 42W (De-rated Wattage Available)	0 120V/277V Self-selected	4 Deep Cone 10"/ Drop Ceiling 5 Deep Cone 10"/ Sheet Rock Ceiling	WF White (Flat (Paint)) CA Clear Anodized	
	62 3000K					
	63 3500K					
	64 4000K					
	65 5000K					
Examples						
863304-CA	DL2e Down Light	3500K	42W	120V/277V	Deep Cone 10"/ Drop Ceiling	Clear Anodized Trim
866305-WF	DL2e Down Light	4500K	42W	120V/277V	Deep Cone 10"/ Sheet Rock Ceiling	White (flat paint) Trim

