





Aluminum surface
with Trim color:



Line Voltage

120Vac or 277Vac line voltage self-selected

DL2e-TC

Junction Box*, IC Rated

80 degree beam

28 watts standard (custom wattage available < 34 watts)

50,000 hours rated life

5 Year Warranty

Suitable for Dry or Damp Location

Operating Temperatures:

When ordering for damp location, request the lens to be sealed.

-40°F to 106°F
-40°C to 40°C

| White | CCT | CRI | Input Power (W) | Useful Lumen (120V/277V) | Eff (lm/w) (120V/277V) | Power Factor (120V/277V) |
|----------|-------|-----|-----------------|--------------------------|------------------------|--------------------------|
| Soft | 2700K | 81 | 28 | 2780 / 2875 | 101 / 103 | 100 / 93 |
| Warm | 3000K | 81 | 28 | 2910 / 2875 | 101 / 103 | 100 / 93 |
| Neutral | 3500K | 83 | 28 | 2960 / 2915 | 102 / 104 | 100 / 92 |
| Cool | 4000K | 84 | 28 | 2970 / 3000 | 104 / 106 | 100 / 93 |
| Daylight | 5000K | 81 | 28 | 3120 / 3090 | 106 / 110 | 100 / 93 |



| 3500K | Standard Frosted Lens | |
|-----------------|-----------------------|------------|
| Input Power (W) | Useful Lumen | Eff (lm/w) |
| 28 | 2915 | 102 |
| 26 | 2680 | 103 |
| 24 | 2500 | 104 |

Mounting:
IC Rated - Mounts to sheet rock or drop ceiling 8", 10", 12" or 14" hole

Application:
Commercial & Residential

Weight: 2.7 lbs

Performance:

The **DL2e-TC Downlight** is powered by a **MCOB (Multi-Chip-On-Board)** light engine. enLux's proprietary thermal management enables the LED emitter to operate at the lowest possible junction temperature which ensures long life and excellent efficacy. A unique **Osram Duris E5** LED emitter is employed for the production of the engine.

The **enLux DL2e-TC Downlight** aluminum housing is finished in an ultra-durable top coat, safe, cool-to-the-touch, 100% recyclable (no mercury or hazardous materials)**.


*California Title 24 compliant, **California Title 22 compliant





DL2e-TC 28W Down Light Photometrics

| 0 ft | Illuminances Distribution Ratio | | | | |
|-------|---------------------------------|-------|-------|-------|-------|
| 3 ft | | | 0.003 | 0.196 | 1.000 |
| 6 ft | | 0.008 | 0.049 | 0.195 | 0.250 |
| 9 ft | 0.002 | 0.007 | 0.022 | 0.059 | 0.111 |
| 12 ft | 0.005 | 0.012 | 0.026 | 0.049 | 0.063 |
| 15 ft | 0.008 | 0.015 | 0.025 | 0.037 | 0.040 |
| 15 ft | 12 ft | 9 ft | 6 ft | 3 ft | CL |

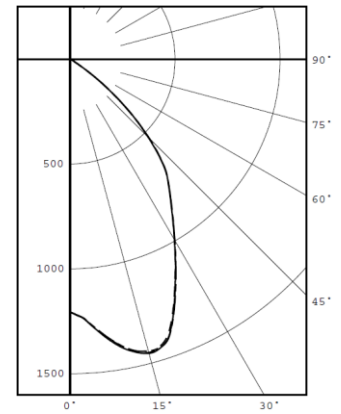


Candle Power Distribution

DL2e-TC 28W 120V Illuminance at Beam Centerline

| CCT | P/N | Total Lumen | Throw Distance (feet) | | | | |
|-------|--------|-------------|-----------------------|------|------|-----|-----|
| | | | 6 | 9 | 12 | 18 | 24 |
| 2700K | 86120X | 2875 | 49.8 | 22.1 | 12.5 | 5.5 | 3.1 |
| 3000K | 86220X | 2875 | 49.8 | 22.1 | 12.5 | 5.5 | 3.1 |
| 3500K | 86320X | 2915 | 50.5 | 22.5 | 12.7 | 5.6 | 3.2 |
| 4000K | 86420X | 3000 | 51.9 | 23.1 | 13.0 | 5.7 | 3.3 |
| 5000K | 86520X | 3090 | 53.5 | 23.8 | 13.4 | 5.9 | 3.4 |

Unit in foot-candle (fc), 1 fc = 10.76 lux

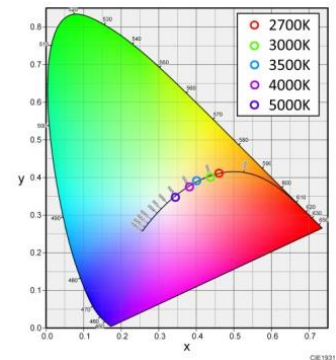

| Product code | Color CCT | Input Power | Voltage | Trim Type/ Configuration | Trim Color |
|--------------|-----------------|--|-------------------------------------|---|------------------------------|
| 8 | 61 2700K | 2 28W (De-rated Wattage Available) | 0 120V/277V Self-Selected | 0 Tapered Cone 8"/ Drop Ceiling | WF White (flat paint) |
| | 62 3000K | | | 1 Tapered Cone 10"/ Drop Ceiling | BF Black (flat paint) |
| | 63 3500K | | | 2 Tapered Cone 8"/ Sheet Rock Ceiling | CA Clear Anodized |
| | 64 4000K | | | 3 Tapered Cone 10"/ Sheet Rock Ceiling | BA Black Anodized |
| | 65 5000K | | | 7 Tapered Cone 12"/ Sheet Rock Ceiling | CR Chrome |
| | | | | AC Aged Copper | |
| | | | | CW Chrome w/ White Ring | |
| | | | | AW Clear Anodized w/ White Ring | |

| Examples | | | | | | |
|------------------|-----------------|-------|-----|-----------|--------------------------------------|-------------------------|
| 861200-BF | DL2e Down Light | 2700K | 28W | 120V/277V | Tapered Cone 8"/ Drop Ceiling | Black (flat paint) Trim |
| 863203-CA | DL2e Down Light | 3500K | 28W | 120V/277V | Tapered Cone 10"/ Sheet Rock Ceiling | Clear Anodized Trim |
| 866202-CR | DL2e Down Light | 4500K | 28W | 120V/277V | Tapered Cone 8"/ Sheet Rock Ceiling | Chrome Trim |